


# SHEET NOTES


- HOSE CONNECTION.
- UNLOADING LINE TO BE TERMINATED WITHIN 1' OF MANHOLE COVER FOR ACCESSIBILITY.
- VENT LINE TO BE TERMINATED 6 FT. ABOVE GRADE WITH GOOSENECK FITTING AND BIRD SCREEN IN A PROTECTED AREA AWAY FROM TRAFFIC.
- TANK ACCESS AREAS TO BE EQUIPPED WITH ACCESS LADDERS AND COVERED BY MANHOLE COVERS.
- REFER TO M20-10 SERIES MECHANICAL DRAWINGS FOR SIZE AND LOCATION OF FIREWATER PIPING
- FITTING TO ALLOW REMOVAL OF PIPING TO OPEN MANWAY IF NEEDED
- REFER TO MECHANICAL DRAWING P10-00-06 PLUMBING - UNDERGROUND PLAN - AREA 6 FOR FIREWATER CONNECTION TO UNDERGROUND TANK

PROJECT LOCATION

6701 EVANSTAD DR N  
MAPLE GROVE, MN 55369

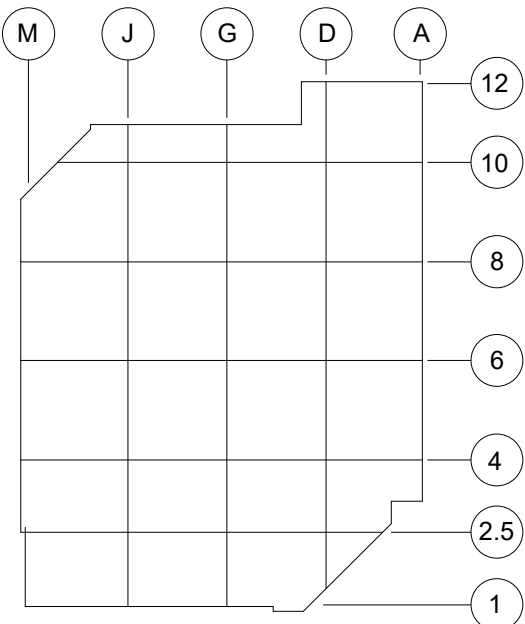

KEYPLAN



CLIENT

UPSHER-SMITH

Partners in Health Since 1919

CONSULTING ENGINEER

**HORWITZ**  
7400 49th AVENUE NORTH  
NEW HOPE, MN 55428  
(763) 533-1900  
www.horwitzinc.com

PROJECT TITLE

PROJECT KEYSTONE - PHASE 1

REV	BY	DATE	DESCRIPTION
A		17DEC21	FOR RECORD

I HEREBY CERTIFY THAT THIS PLAN, SPECIFICATION OR REPORT WAS PREPARED BY ME OR UNDER MY DIRECT SUPERVISION AND THAT I AM A DULY LICENSED ENGINEER UNDER THE LAWS OF THE STATE OF MINNESOTA.

Date 17DEC21 LIC NO

CONFIDENTIAL - THIS DRAWING IS THE PROPERTY OF UPSHER-SMITH. THE INFORMATION CONTAINED HEREIN MAY NOT BE USED OR COPIED IN ANY MANNER WITHOUT THE WRITTEN PERMISSION OF THE OWNER.


PROJ. NO.	2022.1720	DESIGNED BY:	Designer
SCALE:	12" = 1'-0"	CHECKED BY:	Checker
SHEET SIZE:	30x42	APPROVED BY:	Approver

DRAWING TITLE

TRUCK UNLOADING FIRE WATER /  
SPILL CONTAINMENT EXTERIOR OF  
BUILDING

DRAWING NUMBER

PID-7750

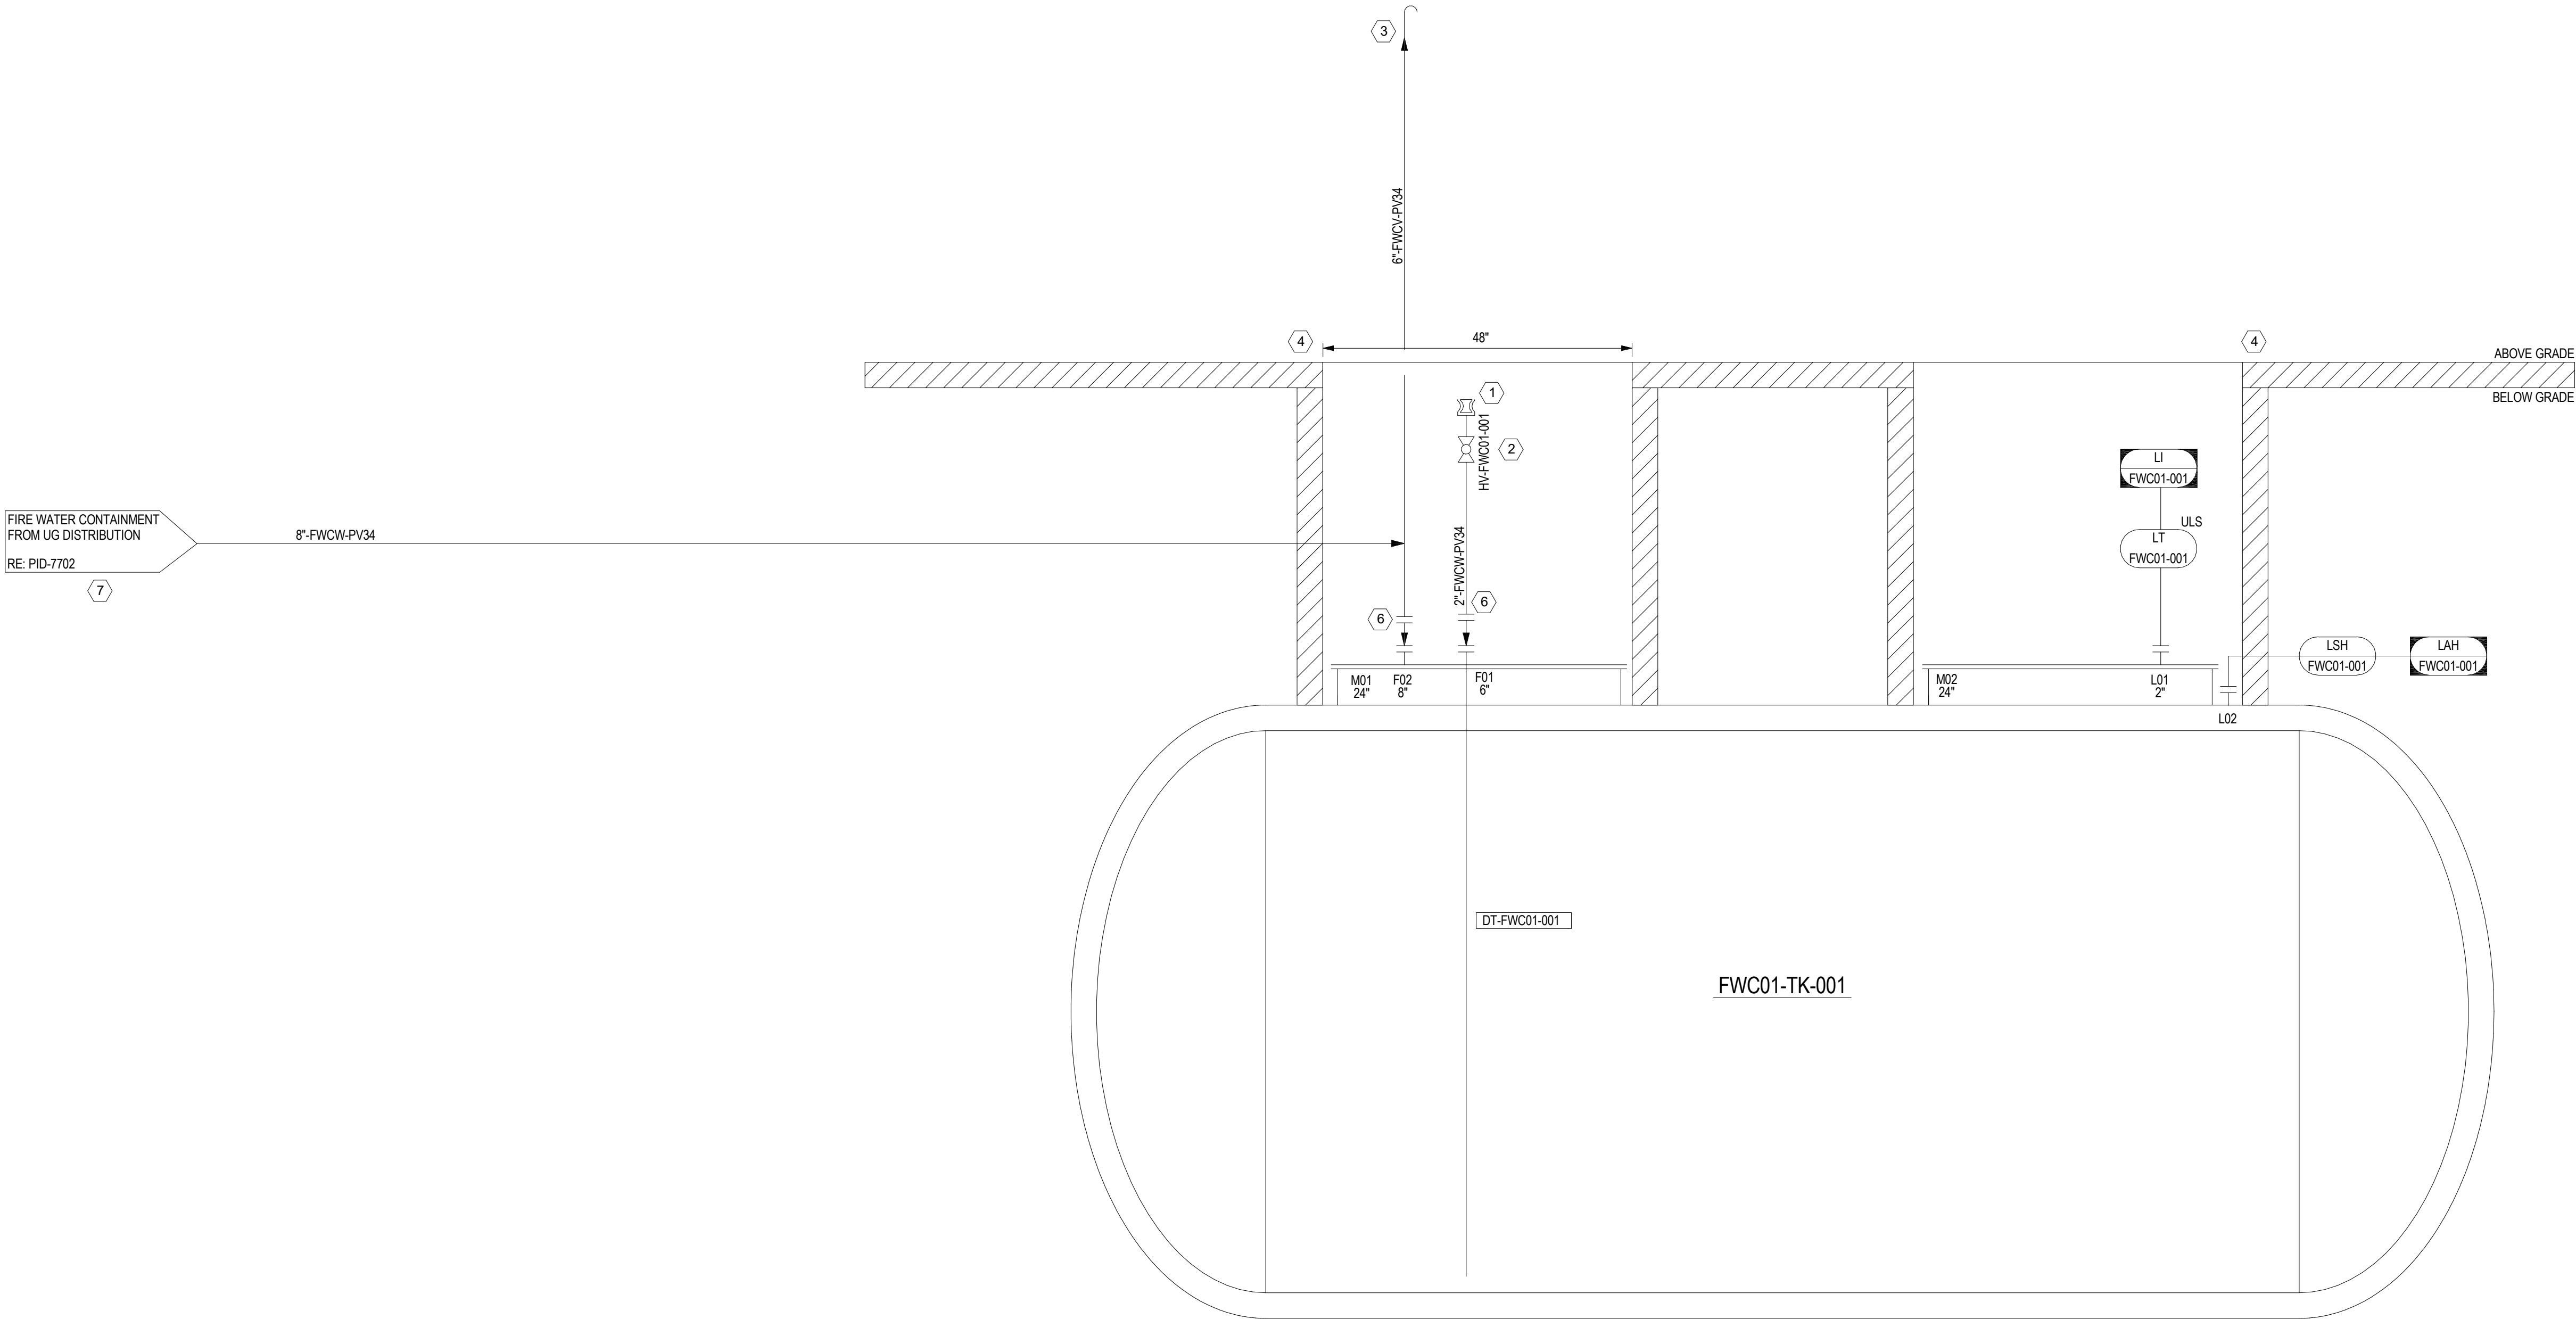

FWC01-TK-001

VENDOR: LANNON TANK COMPANY  
DOUBLE CONTAINED CATCH TANK  
20,000 GALLON  
FRP COATED STEEL