


PROJECT LOCATION

6701 EVANSTAD DR N
MAPLE GROVE, MN 55369

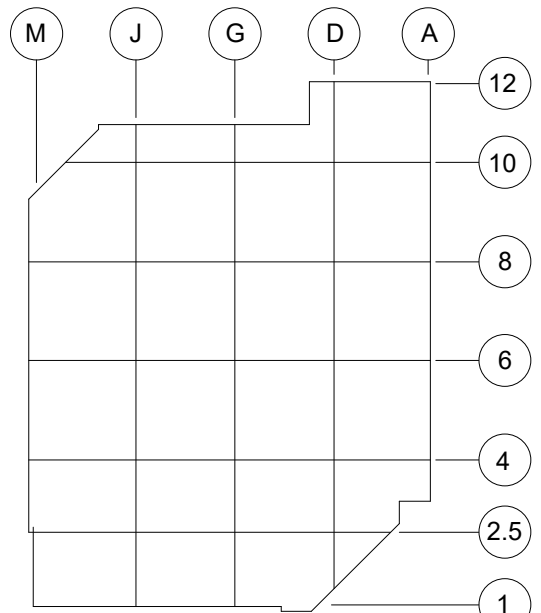

KEYPLAN

CLIENT

UPSHER-SMITH

Partners in Health Since 1919

CONSULTING ENGINEER

Horwitz

7400 49th AVENUE NORTH
NEW HOPE, MN 55428
(763) 533-1900
www.horwitzinc.com

PROJECT TITLE

PROJECT KEYSTONE - PHASE 1

REV	BY	DATE	DESCRIPTION
0	RS	05/25/22	AS RECORDED

LICENSEE

I HEREBY CERTIFY THAT THIS PLAN, SPECIFICATION OR REPORT WAS PREPARED BY ME OR UNDER MY DIRECT SUPERVISION AND THAT I AM A DULY LICENSED ENGINEER UNDER THE LAWS OF THE STATE OF MINNESOTA.

Date **05/25/22** LIC NO _____

CONFIDENTIAL - THIS DRAWING IS THE PROPERTY OF UPSHER-SMITH. THE INFORMATION CONTAINED HEREIN MAY NOT BE USED OR COPIED IN ANY MANNER WITHOUT THE WRITTEN PERMISSION OF THE OWNER.


PROJ. NO.	2022.1720	DESIGNED BY:	Designer
SCALE:	1/2" = 1'-0"	CHECKED BY:	Checker
SHEET SIZE:	30x42	APPROVED BY:	Approver

DRAWING TITLE

PURIFIED WATER ROOM 1725

DRAWING NUMBER

PID-7111

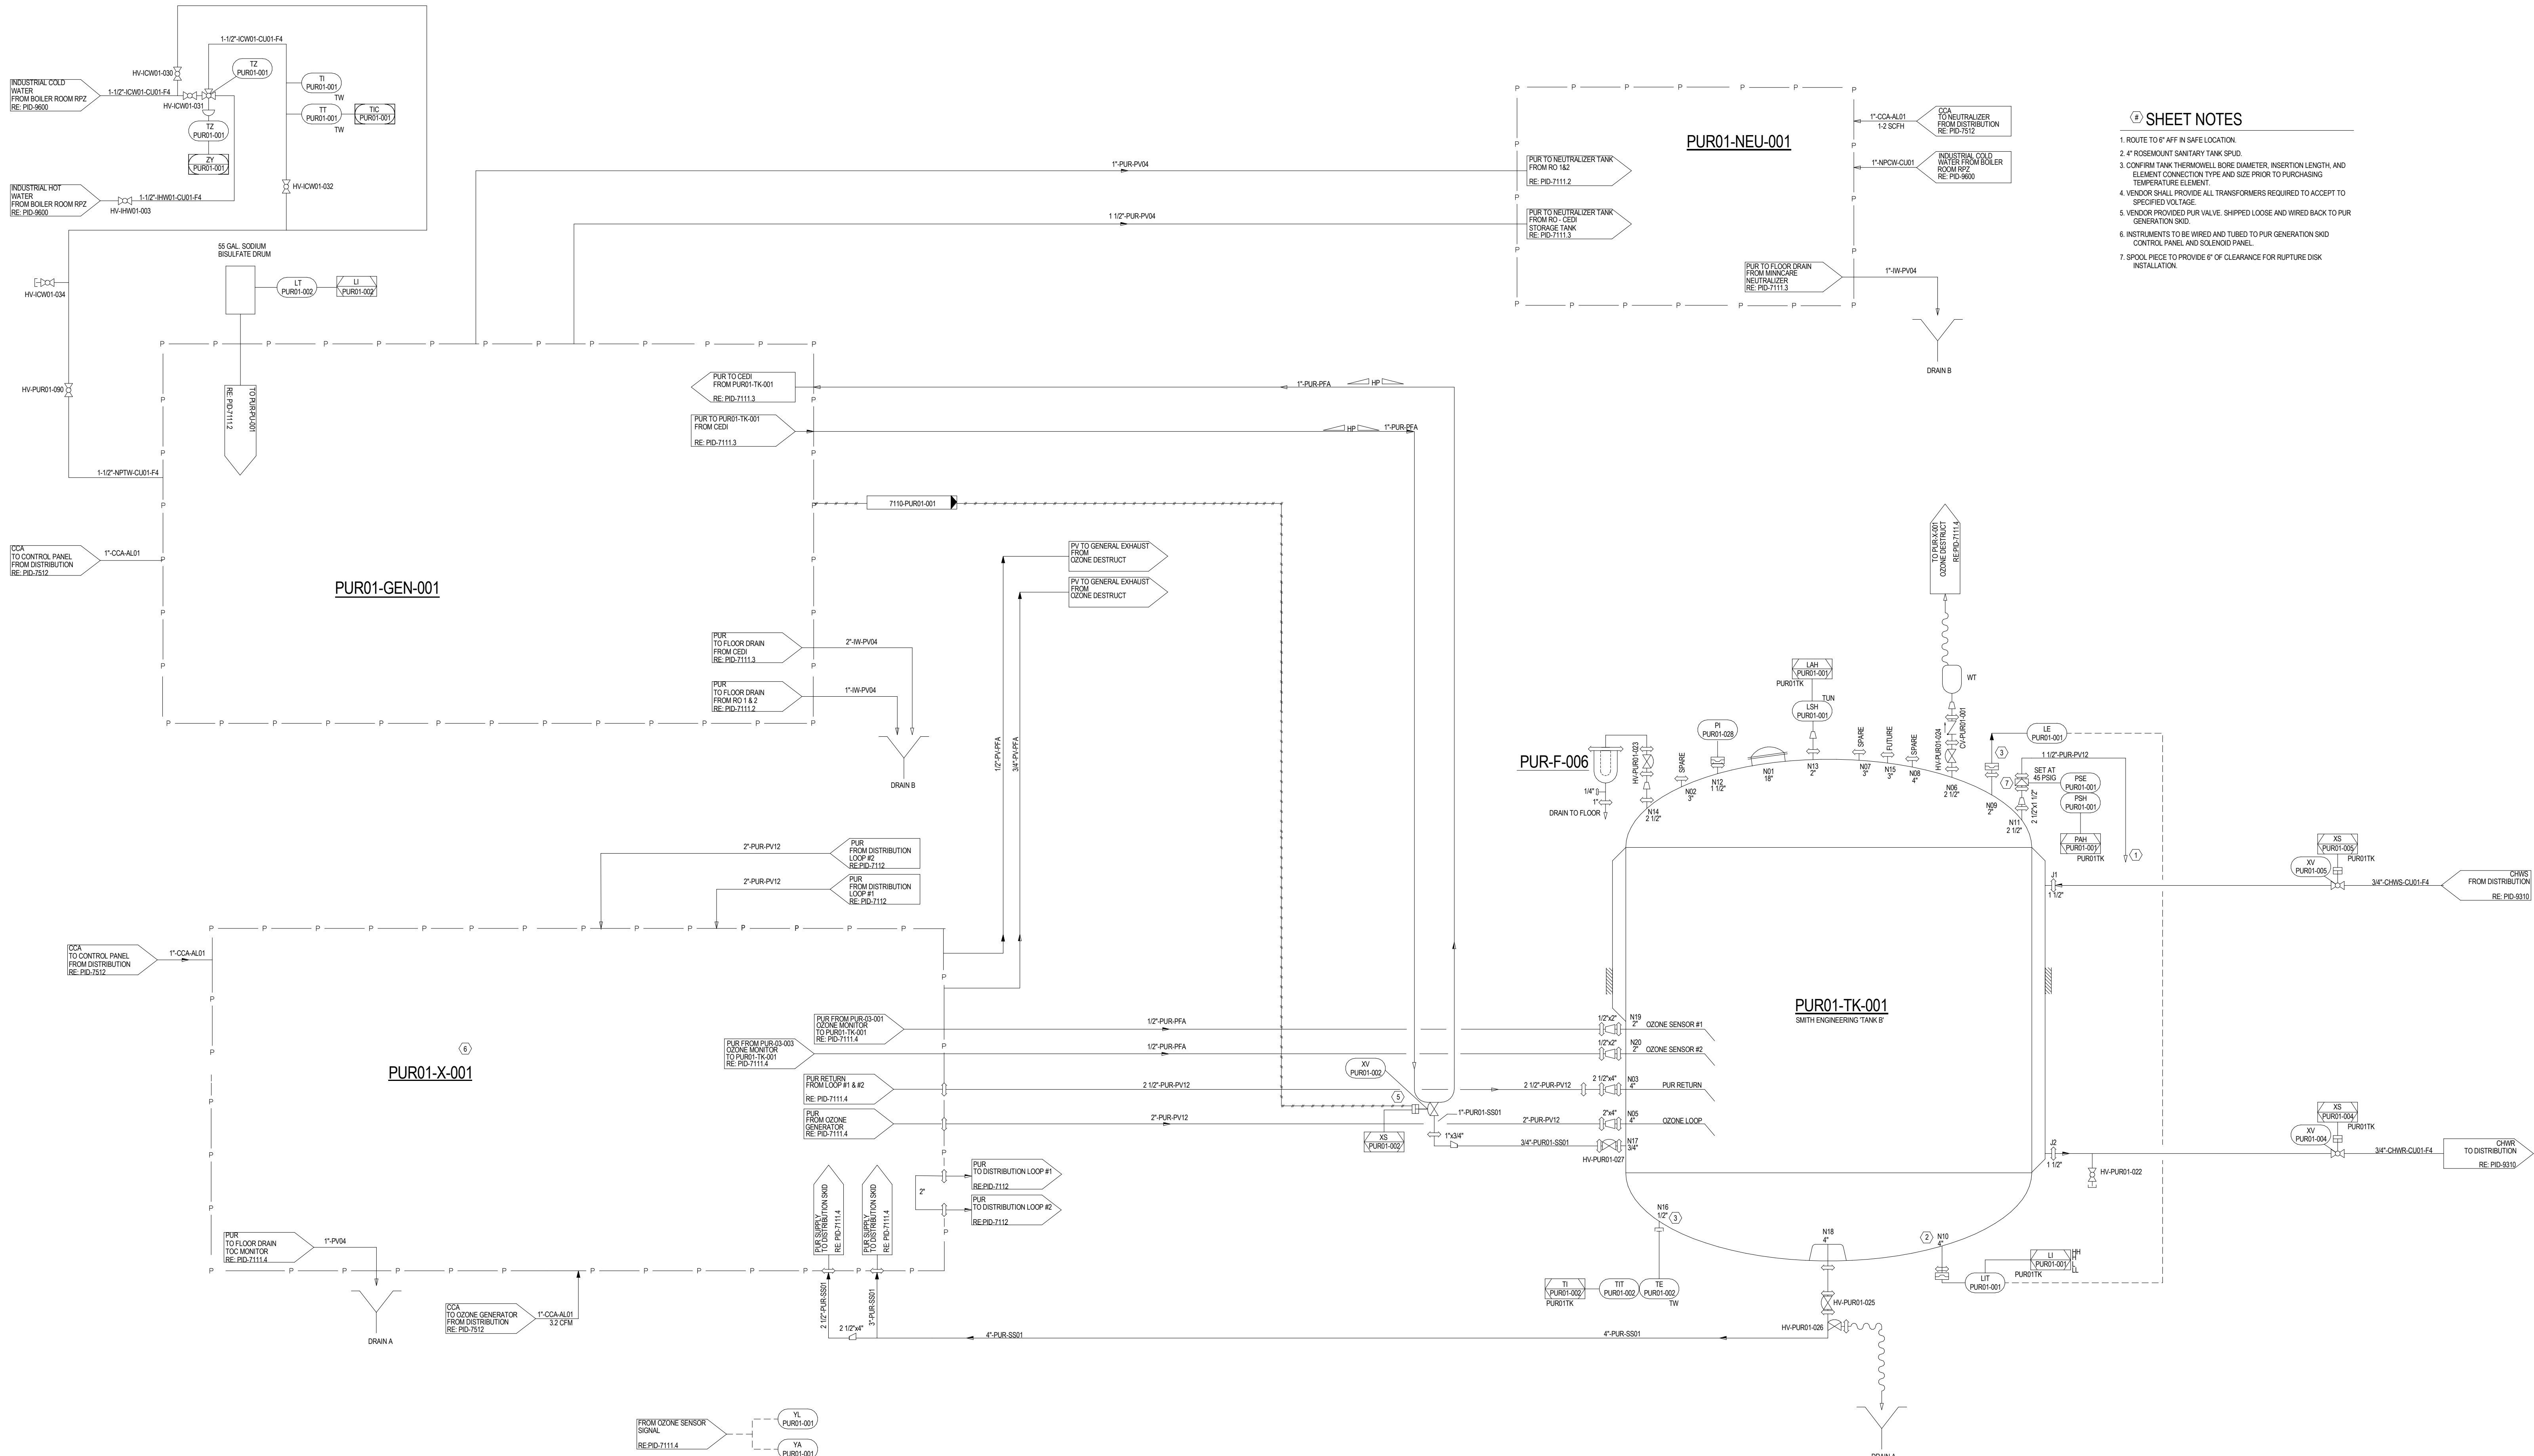

SHEET NOTES

- ROUTE TO 6" AFT IN SAFE LOCATION.
- 4" RESIDENT SANITARY TANK SIZES.
- CONFIRM TANK THERMOWELL BORE DIAMETER, INSERTION LENGTH AND ELEMENT CONNECTION TYPE AND SIZE PRIOR TO PURCHASING TEMPERATURE ELEMENT.
- VENDOR SHALL PROVIDE ALL TRANSFORMERS REQUIRED TO ACCEPT TO SPECIFIED VOLTAGE.
- VENDOR PROVIDED PUR VALVE SHIPPED LOOSE AND WIRED BACK TO PUR GENERATION SMD.
- INSTRUMENTS TO BE WIRED AND TUBED TO PUR GENERATION SMD CONTROL PANEL AND SCLENDID PANEL.
- SPOOL PRES TO PROVIDE 6" OF CLEARANCE FOR RUPTURE DISK INSTALLATION.

PUR01-TK-001
PUR STORAGE VENT FILTER
WORKING VOLUME: 100 GALLONS
DIMENSIONS: TBD
MOC: 316 SS

PUR01-F-001
PUR STORAGE VENT FILTER
TYPE: HYDROPHOBIC
SIZE: 180" SNGL ROUND
FLOW: 15 GPM
MOC: 316 SS

PUR01-GEN-001
PUR GENERATION SMD
CAPACITY: 340 GPM
POWER: TBD

PUR01-X-001
PUR DISTRIBUTION SMD